

WHI643ORAB/W ORA-ITO wall-mounted chimney cooker hood

**Design:**

- Vanished steel and glass finishing
- Touch control

**Features:**

- 3 speed levels
- 2 PowerBoost
- Constant ventilation ReFresh
- AdaptTech automatic fan operation
- Dimmer function, steps setting
- Exhaust air operation


**Technical information:**

- EU Energy efficiency class: B
- EU Fluid dynamic efficiency class: B
- EU Grease filtering efficiency class: A
- EU Lighting efficiency class: B
- Max. airflow by extraction operation: 570m<sup>3</sup>/hr
- Airflow at boost position (PowerBoost 2): 740m<sup>3</sup>/hr
- 2 x 4W LED lamp
- 1 x washable aluminium grease filter
- Total connected load: 284W (10A)
- Voltage (V)/Frequency(Hz): 220-240, 50/60

**Appliance dimensions:**

- 790-990H x600W x 470D


Made in Poland

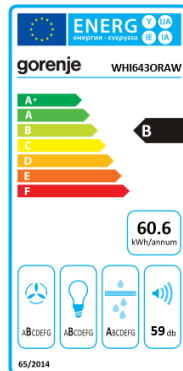

WHI643ORAW



WHI643ORAB

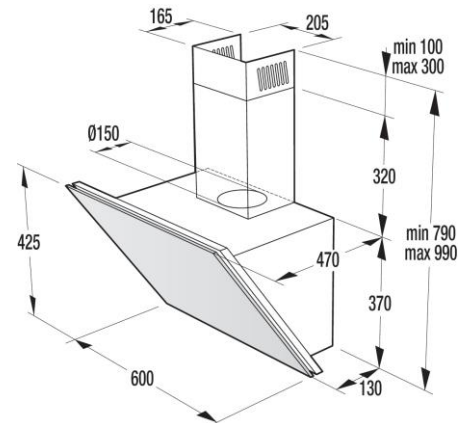

The specifications are subject to change without prior notice. © Toptech Co. Limited May 2017